




Jinan Kaiming Bearing Co., Ltd.

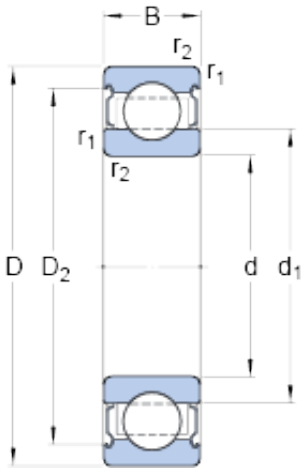

6006-2Z/VA208 Bearing 2D drawings and 3D CAD models

30 mm x 55 mm x 13 mm SKF 6006-2Z/VA208 deep groove ball bearings

Bearing No. 6006-2Z/VA208

Size	55x30x13 mm
Bore Diameter	55 mm
Outer Diameter	30 mm
Width	13 mm
d	30 mm
D	55 mm
B	13 mm
d ₁	38.2 mm
D ₂	49 mm
r _{1,2} - min.	1 mm
d _a - min.	34.6 mm
d _a - max.	38.1 mm
D _a - max.	50.4 mm
r _a - max.	1 mm
Basic dynamic load rating - C	13.8 kN
Basic static load rating - C ₀	8.3 kN
Limiting speed	100 r/min
Limiting temperature - T	350 ° C
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.127
EAN	7316571630724



Jinan Kaiming Bearing Co., Ltd.

Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	Segmented Cage
Cage Material	Graphite
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 55MM Outside Diameter; 13MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Segmented Cage Internal Special Features; C0-Medium Internal Cle
Other Features	Deep Groove Extreme Temperature Variant
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	6006-2Z/VA208
Weight / LBS	0.28
Outside Diameter	2.165 Inch 55 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.512 Inch 13 Millimeter
Bore	1.181 Inch 30 Millimeter
bore diameter:	30 mm



Jinan Kaiming Bearing Co., Ltd.

precision rating:	Not Rated
outside diameter:	55 mm
finish/coating:	Uncoated
overall width:	13 mm
cage material:	Graphite
bore type:	Round
outer ring width:	13 mm
closure type:	Double Shielded
fillet radius:	1 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm:	100 RPM
internal clearance:	C0
series:	60
operating temperature range:	-240 to +660 ° F
resistance features:	Corrosion Resistant, Extreme Temperature
static load capacity:	8.3 kN
d_1	38.2 mm
D_2	49 mm
$r_{1,2}$ min.	1 mm
d_a min.	34.6 mm
d_a max.	38.1 mm
D_a max.	50.4 mm
r_a max.	1 mm
Basic dynamic load rating C	13.8 kN
Basic static load rating C_0	8.3 kN
Limiting temperature T max.	350 ° C
Mass bearing	0.12 kg